ENGINE

	50cc	65cc	85cc	125cc
Engine Type	Single-cylinder, 2-Stroke - Water cooled	Single-cylinder, 2-Stroke - Water cooled	Single-cylinder, 2-Stroke - Water cooled	Single-cylinder, 2-Stroke - Water cooled
Displacement	49,75 cm³	64,9 cm³	84,9 cm³	124,8 cm³
Bore | Stroke	40,3 x 39 mm	45 x 40,8 mm	47,0 x 48,95 mm	54 x 54,5 mm
Cylinder	Nikasil coated aluminium cylinder	Nikasil coated aluminium cylinder	Nikasil coated aluminium cylinder	Nikasil coated aluminium cylinder
Transmission	Single-speed	6-speed gearbox	6-speed gearbox	6-speed gearbox
Combustion Chamber	CNC machined ergal	CNC machined ergal	CNC machined ergal	CNC machined ergal
Exhaust valve	Electronic actuated	Electronic actuated	Electronic actuated	Electronic actuated
Clutch	Automatic	Hydrauilc multi-disc	Hydrauilc multi-disc	Hydrauilc multi-disc
Start	Electric	Electric	Electric	Electric
Carburetor	21 mm	26 mm	30 mm	38 mm

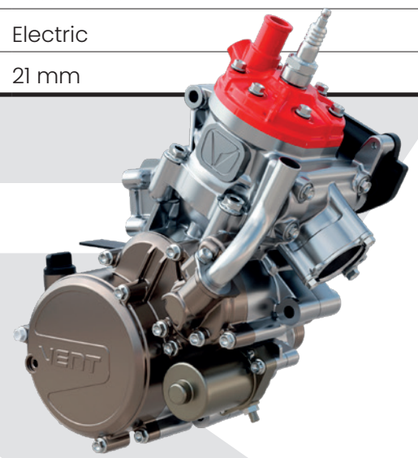

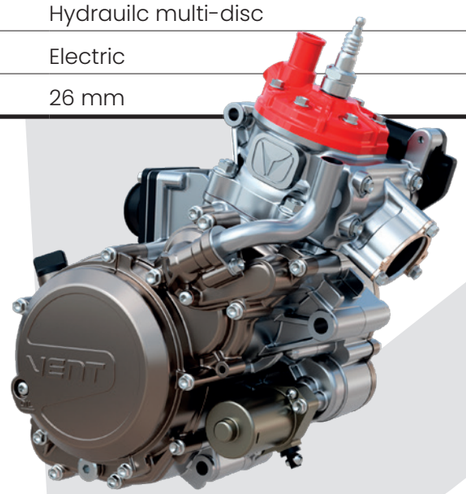

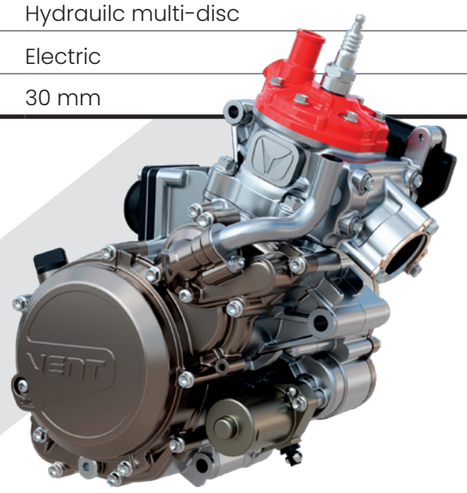

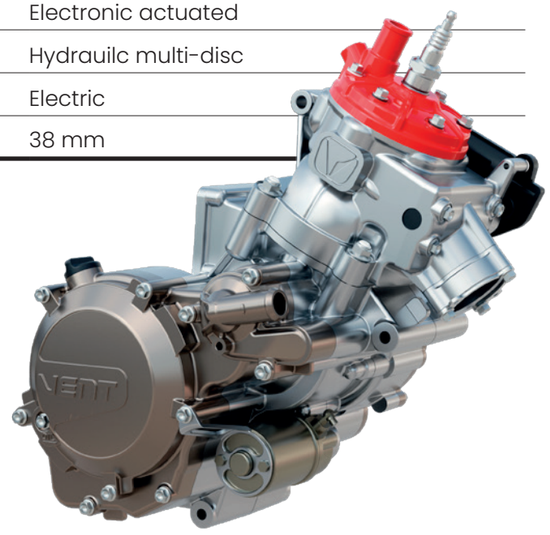



45.978220, 9.450921

VENT Srl
Via alla Cascata 5/7
I-23815 Introbio (LC)
Italy
Phone +39 0341 901533
vent@ventmoto.it

Ventmoto.it

Follow us:

The technical and aesthetic features of the models depicted in this catalog are subject to change without notice

MAIN FEATURES

Frame	High performance aluminum frame
Swingarm	Aluminium with link
Front Suspension	Upside-down, hydraulic adjustable
Rear Suspension	Hydraulic monoshock adjustable
Exhaust valve	Electronic actuated
Start	Electric
Set Up	Adjustable ride height system through interchangeable swingarm and shock absorber setup

85cc model available also in 110cc for U.S. Market

RV85



RV65H

RACE SETUP
Designed for young riders of different heights



RV65

FRAME DETAIL
Aluminium frame built for strength, agility and maximum performance



VENT

PURE RACING DNA